



Upgraded C6CN

1080p
H.265

Smart Home Camera

Wherever you go, it follows.

Now armed with person detection, the upgraded C6CN Wi-Fi Pan-Tilt Camera is all the protection you need when you are away from home.



Motorized Pan and Tilt for 360° Visual Coverage



Night Vision up to 10 m (33 ft)



Advanced AI Person Detection

WDR

True Wide Dynamic Range



Starlight Lens

[H.265]

H.265 Video Technology



Two-Way Talk
5 m (16 ft)
Mic Pickup



Privacy Mode



Wi-Fi 2.4 GHz



Supports MicroSD Cards up to 256 GB



Effortless whole-room viewing.

Got a large space that's left unwatched? The new C6CN Pan-Tilt Camera rotates and tilts smoothly in any direction, giving you a complete view of your room anytime from anywhere using your phone.



Stand-Alone
Stepper Motor



Pan/Tilt



360° Picture



Smart Tracking




Get alerts when movement is detected.

We all want to receive the notifications that matter. Powered by an advanced AI chip with computing capability, the upgraded C6CN detects and tracks the contour of human bodies in real time.



True-WDR for truly clear images.


The new C6CN Camera uses sensor-based True-WDR technology to eliminate overexposure or underexposure in high-contrast scenes, delivering evenly-bright images from dawn to dusk.

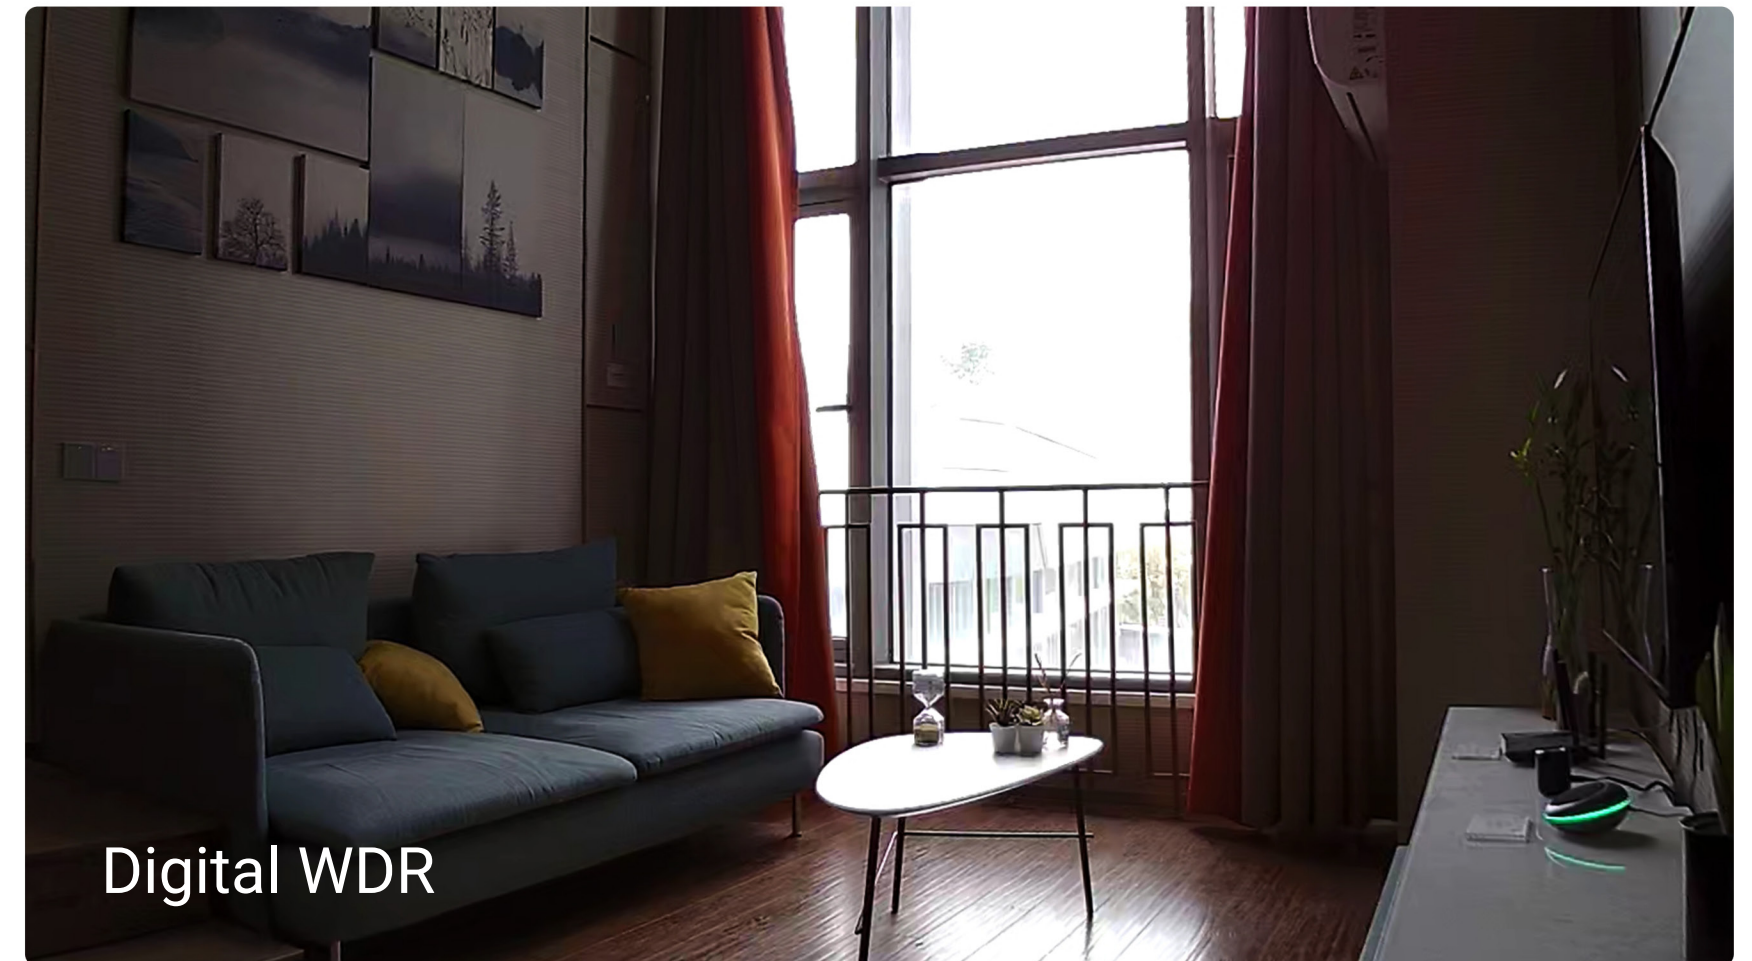

Clearer vision despite the dim light.

With its powerful starlight lens, the upgraded C6CN excels at image clarity and quality, enabling color vision* even in low light conditions where many other cameras may switch to black-and-white video.

It is a must-have for reliable, 7/24 home protection.

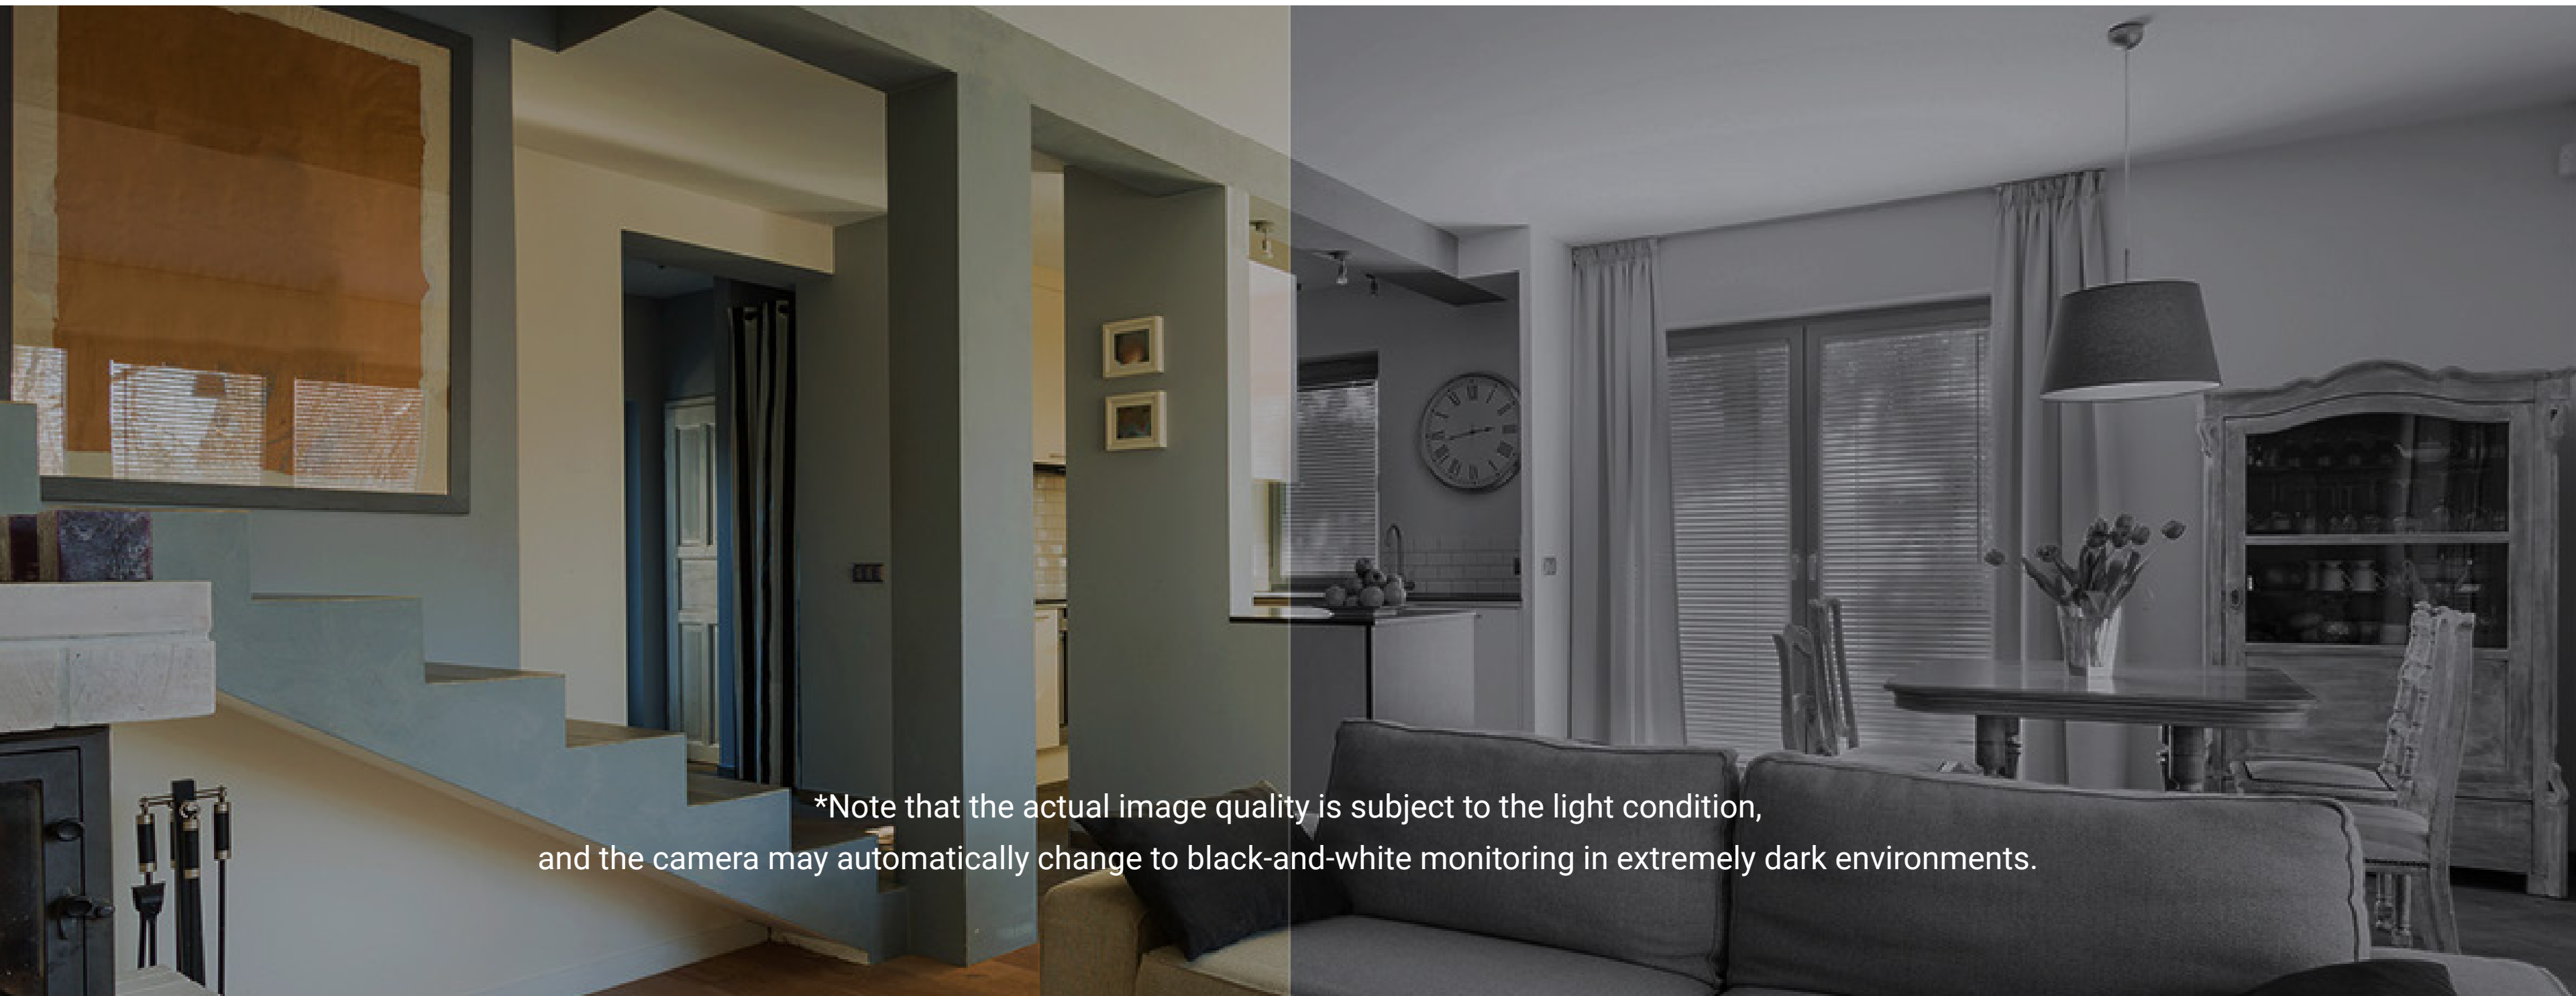

*Note that the actual image quality is subject to the light condition, and the camera may automatically change to black-and-white monitoring in extremely dark environments.

Save money on storage and bandwidth.

The camera features the advanced H.265 video compression technology, achieving better video quality with only half the bandwidth and half the storage space of the previous H.264 video compression standard.

Storage




Bandwidth



Two-way conversations.

Use the EZVIZ App on your mobile device to call home when you are away. Enjoy the opportunity to have a conversation now that both sides can speak to each other as with a normal phone call.

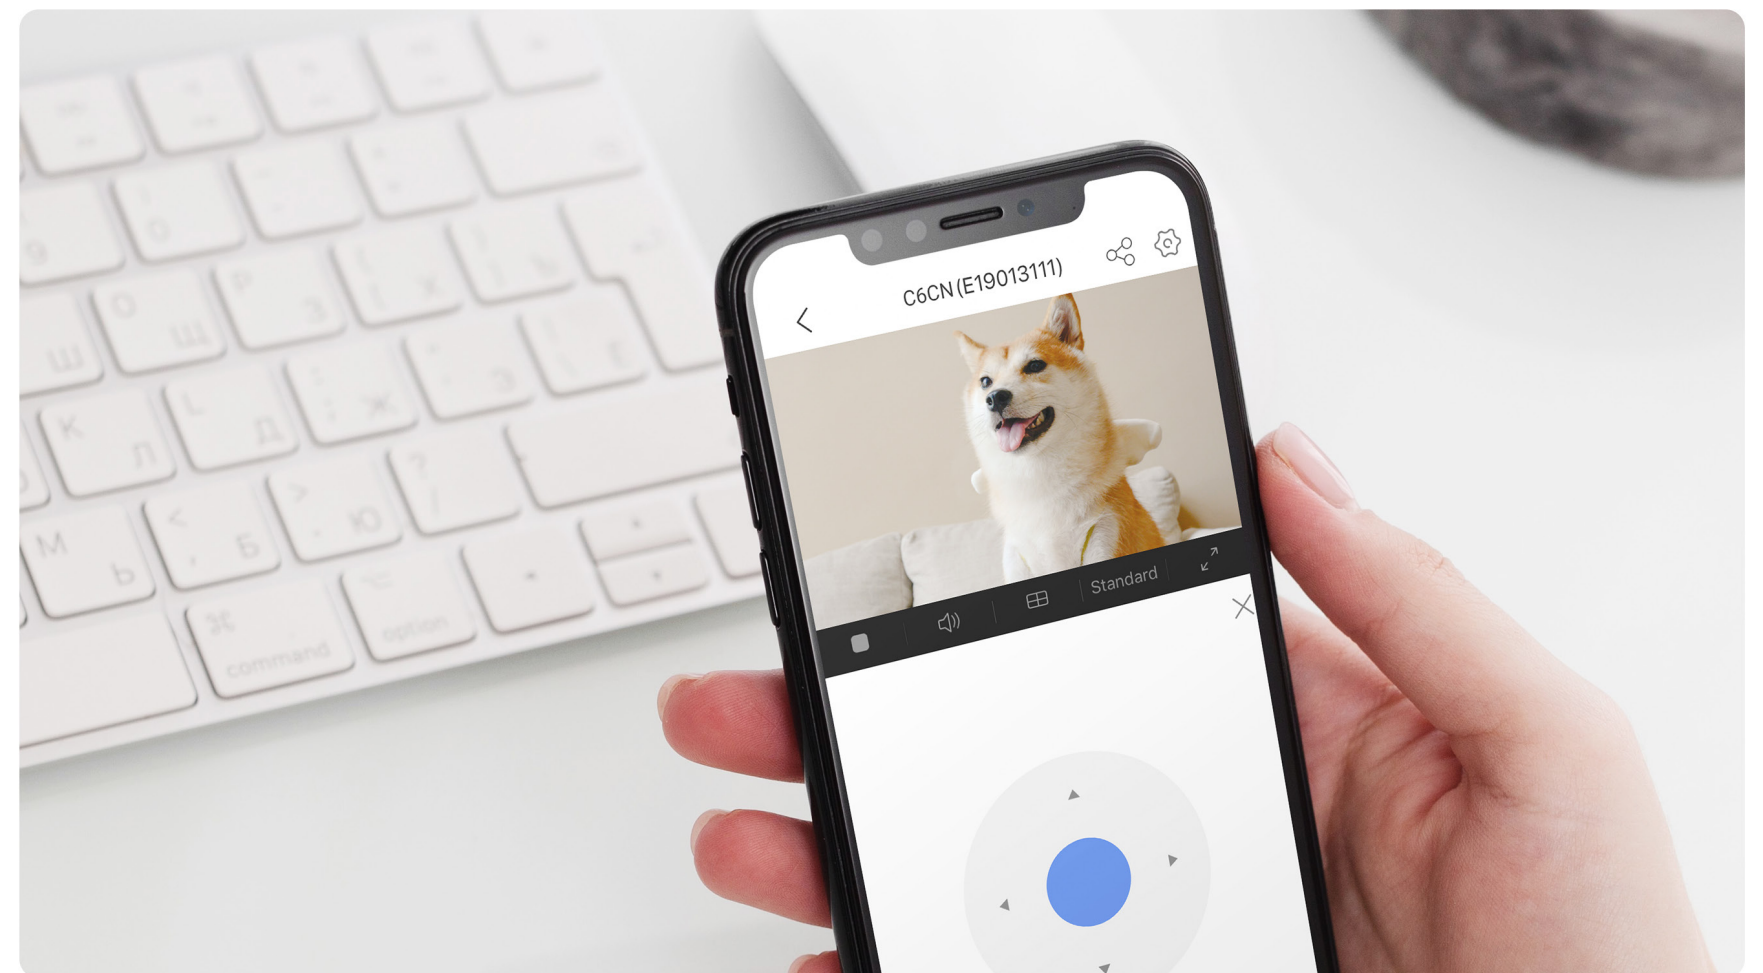

We protect your data and privacy.

Protecting your data and privacy is our highest priority. Data transmission between the camera and the EZVIZ Cloud is encrypted from end to end. Only you have the keys to decrypt your data.



Privacy
Shutter



AES 128-bit
encryption



TLS encryption
protocol



Multiple
authentication steps

Specifications

CS-C6CN-A0-3H2WFR

Camera

Image Sensor	1/3" Progressive Scan CMOS
Shutter Speed	Self-adaptive shutter
Lens	4mm@ F1.6, view angle: 81° horizontal, 42° vertical, 94° diagonal
PT Angle	Pan: 340° , Tilt: 120°
Minimum Illumination	0.5 lux @(F1.6, AGC ON), 0 lux with IR
Lens Mount	M12
Day & Night	IR-cut filter with auto switch
DNR	3D DNR
WDR	True-WDR
BLC	Supports
Night Vision	10 m (33 ft.)

Video & Audio

Max. Resolution	1920 × 1080
Frame Rate	Max:25fps; Self-adaptive during network transmission
Video Compression	H.265
H.264 Type	Base Profile
Video Bit Rate	Ultra-HD; HD; Standard. Adaptive bit rate.
Audio Bit Rate	Self-adaptive
Max. Bitrate	2 Mbps

Network

Wi-Fi Standard	IEEE802.11 b/ g/ n
Frequency Range	2.4 GHz ~ 2.4835 GHz
Channel Bandwidth	Supports 20MHz
Security	64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSK
Transmission Rate	11b: 11Mbps, 11g :54Mbps, 11n :72Mbps
Wi-Fi Pairing	AP pairing
Protocol	EZVIZ Cloud proprietary protocol
Interface Protocol	EZVIZ Cloud proprietary protocol
Wired Network	RJ45 × 1(10M/100M adaptive Ethernet port)

Features

Smart Alarm	AI Person Detection
Customized Activity Zones	Supports
Two-Way Talk	Supports
General Features	Anti-Flicker, Dual-Stream, Heart Beat, Mirror Image, Password Protection, Watermark

Specifications

CS-C6CN-A0-3H2WFR

Storage

Local Storage	Micro SD card slot (Max. 256 GB)
Cloud Storage	EZVIZ Cloud Storage

General

Operating Conditions	-10°C ~ 45°C (14°F to 113 °F), Humidity 95% or less (non-condensing)
Power Supply	DC 5V/1A
Power Consumption	Max. 5W
Product Dimensions	88 × 88 × 111.9 mm (3.46 × 3.46 × 4.41 inch)
Packaging Dimensions	103 × 103 × 186mm (4.06 × 4.06 × 7.32 inch)
Product Weight	255 g (0.56 lbs) (9 oz)
Packaging Weight	513 g (1.13 lbs) (18 oz)

In the box:

- C6CN Camera
- Base
- Power Adapter
- 3 m (9.8 ft) Power Cable
- Screw Kit
- Drill Template
- Quick Start Guide

Certifications:

FCC / UL / CE / WEEE / REACH / ROHS

Specifications are subject to change without notice. "  ", "EZVIZ™" and other EZVIZ's trademarks and logos are the properties of EZVIZ in various jurisdictions. Other brands and product names are trademarks or registered trademarks of their respective holders.

<https://www.ezvizlife.com/>