


Network Video Recorder

NVR302-S-P Series

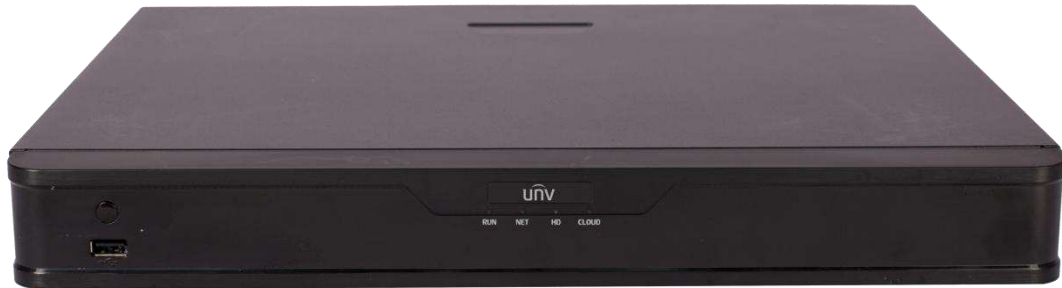

Key Features


- Support Ultra265/H.265/H.264 video formats
- 8/16-channel input
- Plug & Play with 8/16 independent PoE network interfaces
- Third-party IP cameras supported with ONVIF conformance: Profile S, Profile G, Profile T
- Support HDMI and VGA simultaneous output
- Up to 8 Megapixels resolution recording
- 2 SATA HDDs, up to 10TB for each HDD
- ANR technology to enhance the storage reliability when the network is disconnected
- Support cloud upgrade

Specifications

Model	NVR302-08S-P8		NVR302-16S-P8	NVR302-16S-P16
Video/Audio Input				
IP Video Input	8-ch	16-ch		16-ch
Two-way Audio Input	1-ch, RCA			
Network				
Incoming Bandwidth	160Mbps			
Outgoing Bandwidth	96Mbps	96Mbps		96Mbps
Remote Users	128			
Protocols	P2P, UPnP, NTP, DHCP, PPPoE			
Video/Audio Output				
HDMI/VGA Output	VGA: 1024X768@60, 1280X720@60, 1280X1024@60, 1920X1080@50, 1920X1080@60 HDMI: 4k (3840x2160@30), 4k (3840x2160@60), 1024X768@60, 1280X720@60, 1280X1024@60, 1920X1080@50, 1920X1080@60			
Recording Resolution	8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF			
Audio Output	1-ch, RCA			
Synchronous Playback	8-ch	16-ch		16-ch
Corridor Mode Screen	3/4/5/7/9	3/4/5/7/9/10/12/16		3/4/5/7/9/10/12/16
Decoding				
Decoding format	Ultra265/H.265/H.264			
Live view/Playback	8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF			
Capability	1 x 4K@30, 2 x 4MP@30, 3 x 3MP@25, 4 x 1080P@30, 8 x 720P@30	1 x 4K@30, 2 x 4MP@30, 3 x 3MP@25, 4 x 1080P@30, 8 x 720P@30,16 x D1	1 x 4K@30, 2 x 4MP@30, 3 x 3MP@25, 4 x 1080P@30, 8 x 720P@30,16 x D1	
Hard Disk				
SATA	2 SATA interfaces			
Capacity	up to 10TB for each disk			
External Interface				
Network Interface	1 RJ-45 10M/100M/1000M self-adaptive Ethernet Interface			
USB Interface	Front panel: 1 x USB2.0, Rear panel: 1 x USB2.0			
Alarm In	4-ch			
Alarm Out	1-ch			
PoE				
Interface	8 RJ-45 10M/100M self-adaptive Ethernet Interface			16 RJ-45 10M/100M self-adaptive Ethernet Interface
Max Power	Max 30W for single port Max 130W in total	Max 30W for single port Max 130W in total	Max 30W for single port Max 240W in total	
Supported Standard	IEEE 802.3af/at			
General				
Power Supply	220V AC Power Consumption: ≤9 W (without HDD)			
Working Environment	-10°C~+ 55°C (+14°F~+131°F), Humidity ≤ 90% RH (non-condensing)			
Dimensions (W×D×H)	380mm ×315mm × 53mm (15.0" × 12.4" ×2.1")			


Weight (without HDD)	≤2.4kg (5.29lb)
----------------------	-----------------

Dimensions

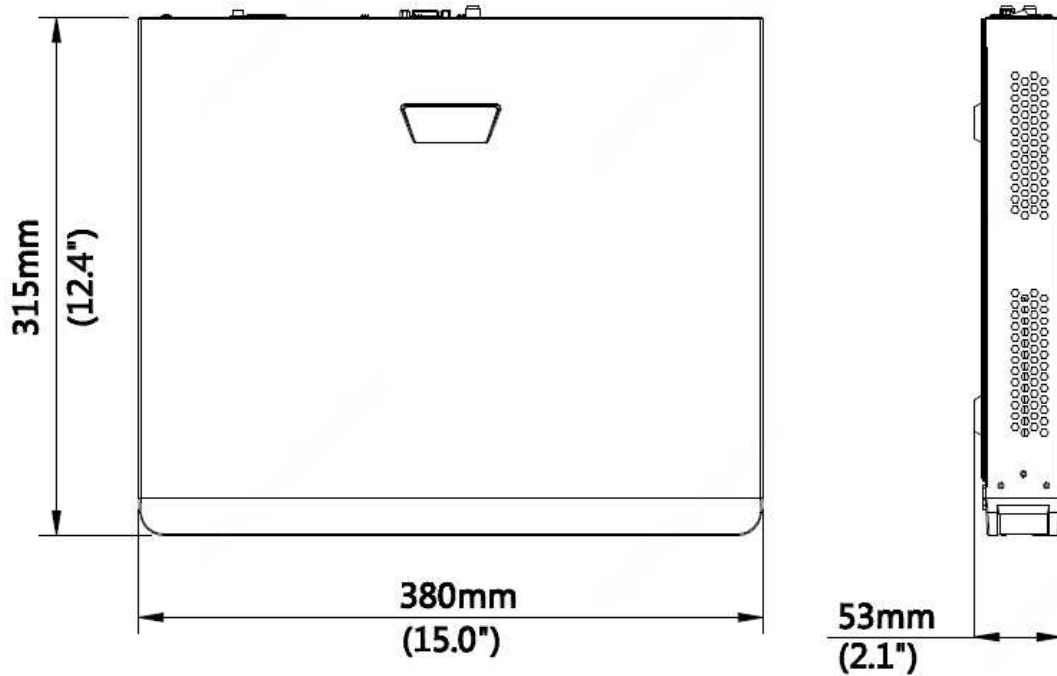

Rear Panel

Take **NVR302-16S-P8** for example

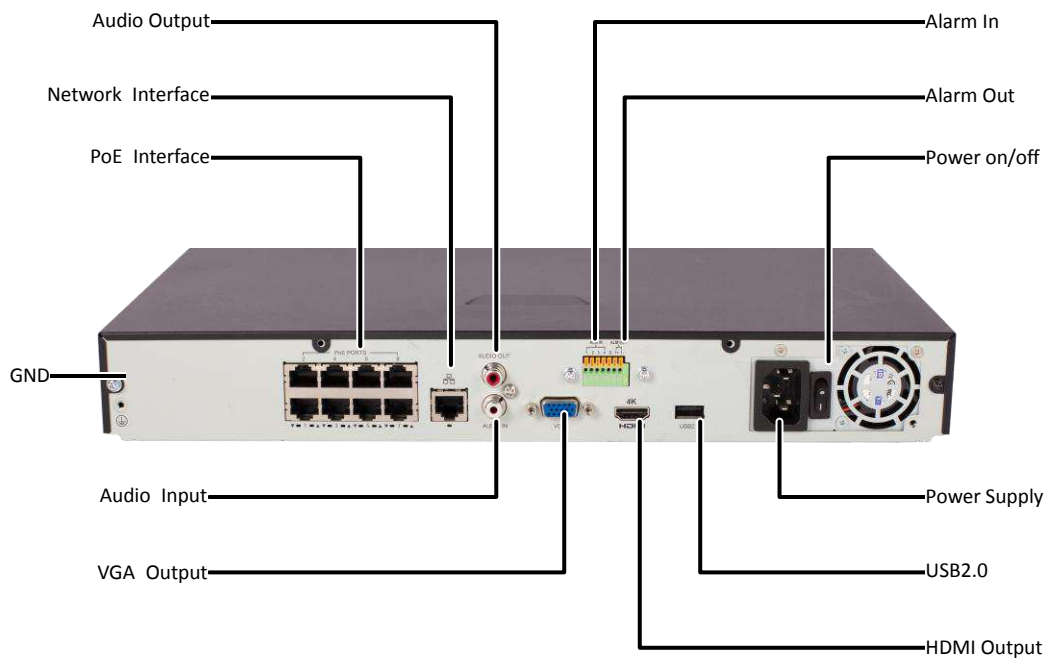



Zhejiang Uniview Technologies Co., Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://sgcdn.uniview.com>

©2019 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

* Product specifications and availability are subject to change without notice.