

5MP HD Fixed IR Turret Analog Camera

UAC-T115-F28

UAC-T115-F40



Introduction

UAC-T115-F28/F40 is a 5MP HD Fixed IR Turret Analog Camera with a high-performance 1/2.7-inch CMOS sensor. It supports TVI/AHD/CVI/CVBS, which effectively enhances product adaptability and diversity of networking solutions. With SYV-75-3 or other coaxial cable types the camera can achieve low-cost, long-distance, anti-interference, and low delay mega-pixel HD video transmission. The camera supports IR cut filter and provides color images at daytime and black/white images at night.

Features


- 5MP high quality image
- TVI/AHD/CVI/CVBS
- IR-cut filter with auto switch (ICR)
- Supports 180° horizontal flip, 180° vertical flip
- OSD configuration menu, easy to operate
- IP67 waterproof and dustproof design, high reliability
- OSD configuration menu in 11 languages

Specifications

Model		UAC-T115-F28	UAC-T115-F40
Sensor			
Pixel	5MP		
Size	1/2.7"		
Minimum illumination	0.02lux(F2.0, AGC ON) 0.00 lux (IR on)		
Lens			
Lens	2.8mm	4.0mm	
Lens mount	M12		
Angle of view	H: 102.2° V: 53.9° D: 124.8°		H: 82.87° V: 46.01° D: 99.95°
Illuminator			
Illuminator	One IR illuminator		
Illumination distance	20m		
Lifetime	≥60,000 hours		
Video			
Resolution	5MP@25fps: 2880(H)×1620(V); 5MP@20fps: 2592(H)×1944(V); 5MP@12.5fps: 2592(H)×1944(V) 4MP: 2560(H)×1440(V) 2MP: 1920(H)×1080(V)		
Frame rate	TVI: 5MP@20fps, 5MP@12.5fps, 4MP@30fps, 4MP@25fps, 1080P@30fps, 1080P@25fps AHD: 5MP@20fps, 4MP@30fps, 4MP@25fps, 1080P@30fps, 1080P@25fps CVI: 5MP@25fps, 4MP@30fps, 4MP@25fps, 1080P@30fps, 1080P@25fps CVBS: PAL, NTSC		
Shutter time	PAL: 1/25s-1/50000s NTSC: 1/30s-1/50000s		
Image			
Exposure mode	4 modes: Global (default), BLC, HLC, DWDR		
Day/Night	3 modes: Auto (default), Day, Night		
Digital noise reduction	2D		
White balance	Two modes: Auto (default), Manual		
WDR	DWDR		
Smart IR	Support		
Flip	Supports 180° horizontal flip, 180° vertical flip.		
Interface			
Power	5.5mm power interface		
Video output	BNC, supports TVI/AHD/CVI/CVBS		
Operating environment			
Temperature	-30°C to 60°C(-22°F to 140°F)		
Humidity	≤95% (RH, non-condensing)		
Surge protection	4KV		
Ingress protection	IP67		
General			
Power	DC 12V(±25%), with reverse polarity protection and surge protection, Max 5.04W		
Mount	Ceiling mount (default), optional backbox, wall mount bracket		

Dimensions	Φ118mm*96mm (diameter*height)
Material	Plastic
Weight	182g(0.401lb)
Certification	CB, CE, FCC

Dimensions

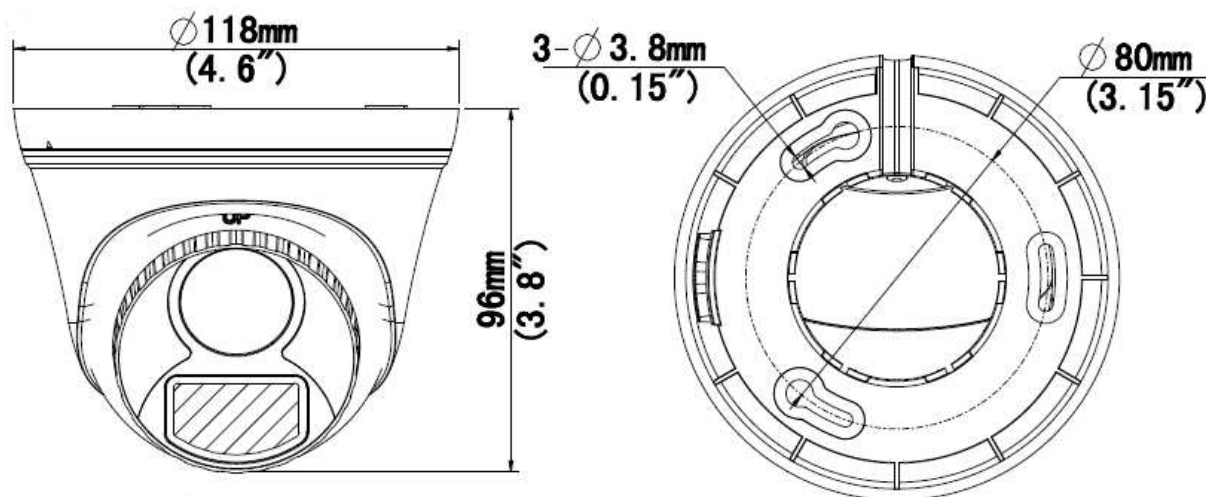

UAC-T115-F28/F40

Ordering Information

Model	Remarks
UAC-T115-F28	5MP HD Fixed IR Turret Analog Camera (2.8mm fixed-focal lens, 20m IR, DC12V)-Overseas version, power adapter sold separately
UAC-T115-F40	5MP HD Fixed IR Turret Analog Camera (4.0mm fixed-focal lens, 20m IR, DC12V)-Overseas version, power adapter sold separately

Accessory Model	Image	Remarks
TR-JB03-I-IN		Plastic turret camera backbox (supports rear cabling)-D117.75mm*37.5mm, sold separately
TR-WM03-D-IN		Fixed mini dome/plastic turret camera wall mount bracket --126.42mm*125.57mm*183.37mm, sold separately
TR-JB07/WM03-G-IN		Fixed mini dome/plastic turret camera wall mount bracket --126.42mm*126.65mm*230.47mm, sold separately

Zhejiang Uniview Technologies Co., Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China (310051)

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2022 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.