


Product Description

- Comply With Cat6 Specifications
- 4-Pair Unshielded Twisted Pair (UTP) Cable
- 24AWG Solid Copper-clad Aluminum Conductor
- PE Jacket
- This Cable Will Meet The Requirements of ANSI/TIA-568.2-D Category 6 and ISO 11801 Class E

Structure

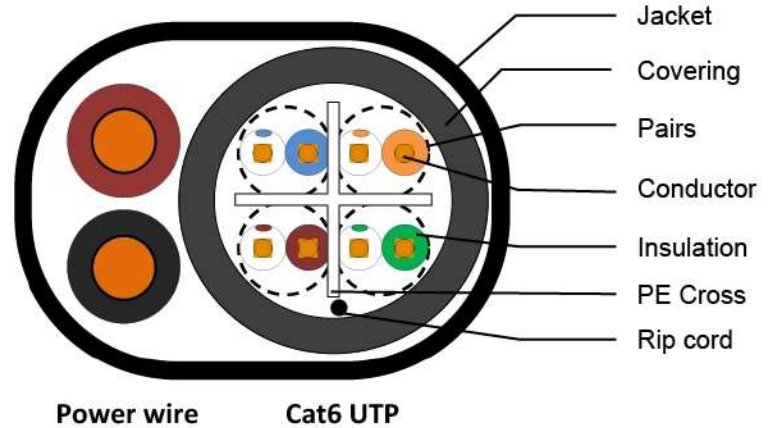

Conductor

- Material : Solid Copper-clad Aluminum
- AWG: 24AWG
- SIZE: 1/0.50±0.008mm

Insulation

- Material : HD-PE
- AVG: Thickness (nom) :0.20mm
- Diameter : 0.90±0.05mm

Jacket

- Material : PE
- Avg. thickness: 0.65±0.10mm
- Diameter: 6.60*10.30±0.20mm
- Color: Black

Packaging Method

- GL6007: 305M/R Wooden drum + ctn

Power wire

- Material: Stranded Copper-clad Aluminum
- AWG: 19AWG
- SIZE: 24/0.20±0.008mm

Power wire

- Material : PVC
- AVG: Thickness (nom) : 0.50±1.0mm
- Diameter : 2.0±0.15mm

Insulation Color

- 1) Blue * White/Blue
- 2) Orange * White/Orange
- 3) Green * White/Green
- 4) Brown * White/Brown

Covering

- Material : PVC
- Avg. thickness: 0.50±0.10mm
- Diameter: 5.80±0.20mm
- Color : Black

Rip cord

- Material: Nylon

Cross

- Material: PE

Other Properties

- Installation temperature: 0~50°C
- Operating temperature: -20°C to 75°C
- Min bending radius: 10xOD in operation, 7xOD after operation

