

Outdoor Full-Color

Dual-Lens Varifocal Pan Tilt Network Camera

MODEL: VIGI C540V (3× Zoom)



4MP | H.265+

VIGI C540V | 3× Zoom



Instant Zoom



Human & Vehicle
Classification



Smart Detection



Powerful Pan Tilt



IP66*



Onboard Storage**

// Human & Vehicle Classification


Intelligently distinguishes humans and vehicles from other objects, so you receive more accurate event notifications.



// Smart Detection



**Motion
Detection**




**Region
Intrusion**



**Object Removal
Detection**



**Region Exiting
Detection**



Line-Crossing



**Camera
Tampering**



**Object Abandoned
Detection**



**Region Entering
Detection**

// Zoom

- Instant Zoom
- Sharp & Stable Image Definition


// Flexible Pan Tilt

- Customized Patrol
- Power-Off Memory Function
- Auto Tracking
- Remote Monitoring & Configuration

// VIGI Surveillance Solution


The VIGI professional surveillance system by TP-Link is dedicated to protecting the business that you've worked hard to build—whenever, wherever.

Outstanding functions, reliable quality guarantees, and simplified installation work together to ensure your business stays safe and sound.

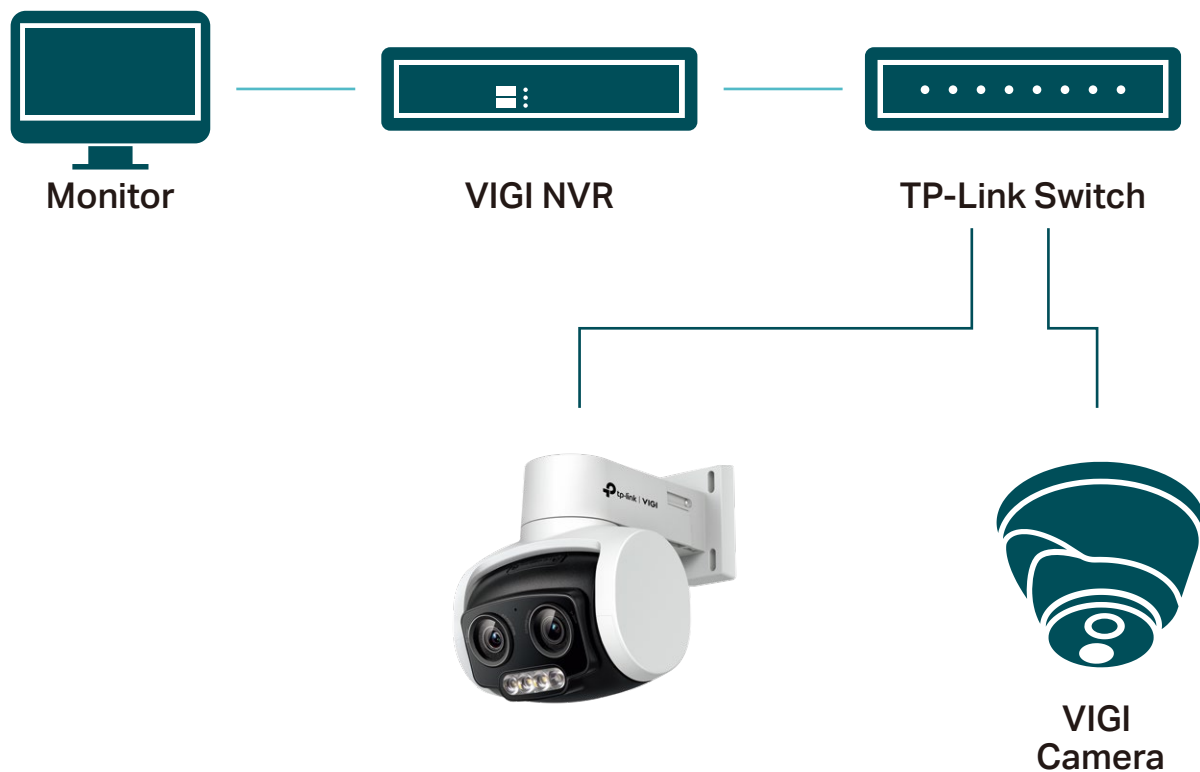

// Flexible Installation

Find the perfect vantage point by simply securing your camera to the ceiling, wall, or pole**.

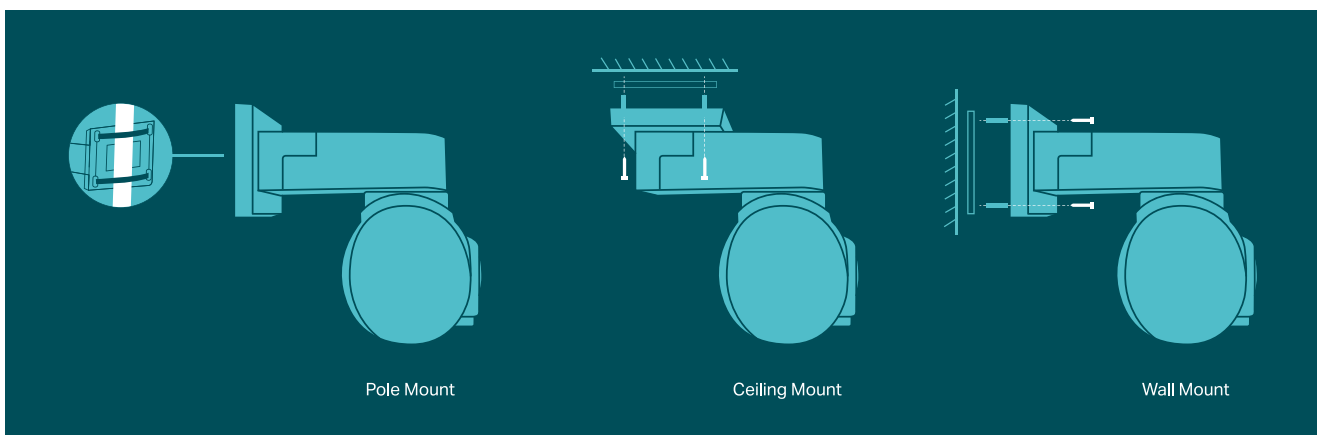

Specifications

Camera	
Product Model	VIGI C540V
ROM	128 MB
RAM	1 G
Image Sensor	1/3" Progressive Scan CMOS
Shutter Speed	1/3 to 1/10000 s
Slow Shutter	Yes
Min. Illumination	0.005 Lux, 0 Lux with IR/white light
Day & Night	IR Cut Filter
Day/Night Switch	Day/Night/Auto/Schedule-Switch
Zoom	3x Mixed Zoom
Lens	
Focal Length	4-12 mm (Mixed Zoom)
Aperture	F1.6
FOV	Diagonal FOV: 100°, Horizontal FOV: 84°, Vertical FOV: 46°
Lens Mount	M12*P 0.5
Angle Adjustment (Manual)	
Range	Pan: 0° to 332°, Tilt: 0° to 120°
PTZ	
Pan/tilt Range	Pan: 0° to 332°, Tilt: 0° to 120°
Pan/tilt Speed	Pan Speed: Configurable from 1° to 55°/s, Preset Speed: 55°/s Tilt Speed: Configurable from 1° to 40°/s, Preset Speed 40°/s
Presets	300

Patrol Scan	8 patrols, up to 8 presets for each patrol
Power-off Memory	Yes, Auto restore to previous PTZ and lens status after power failure
Park Action	Yes, Preset, Patrol Scan
3D Positioning	Yes
Illuminator	
IR LED	Quantity: 1 Range: 30m Wavelength: 850nm
White LED	Quantity: 3 Range: 30m
Illuminator On/Off Control	Auto/Scheduled/Always on/Always off
Video	
Max. Resolution	2560 X 1440
Main Stream	<p>Frame Rate: 50Hz: 1fps, 5fps, 10fps, 15fps, 20fps, 25fps 60Hz: 1fps, 5fps, 10fps, 15fps, 20fps, 25fps, 30fps Resolution: 2560x1440, 2304x1296, 2048x1280, 1920x1080, 1280x720</p> <p>Note: If the image rotation is set to 90° or 270°, the frame rate only supports up to 20fps.</p>
Sub-Stream	<p>Frame Rate: 50Hz: 1fps, 5fps, 10fps, 15fps, 20fps, 25fps 60Hz: 1fps, 5fps, 10fps, 15fps, 20fps, 25fps, 30fps Resolution: 640x480, 352x288, 320x240</p> <p>Note: If the image rotation is set to 90° or 270°, the frame rate only supports up to 20fps.</p>
Bit Rate Control	CBR, VBR
Video Compression	Main Stream: H.265+/H.265/H.264+/H.264 Sub-Stream: H.265/H.264
H.264 Type	Main Profile/High Profile


H.264+	Main Stream Supported
H.265 Type	Main Profile
H.265+	Main Stream Supported
Video Bit Rate	Main Stream: 256 Kbps to 4 Mbps Sub-Stream: 64 Kbps to 512 Kbps
Image	
Image Settings	Mirror, Brightness, Contrast, Saturation, Sharpness, Exposure, WDR, White Balance, Prevent Overexposure to Infrared Light, HLC Adjustable by Client Software, Rotation (90°/270°)
Image Enhancement	BLC/3D DNR/HLC/SmartIR
Wide Dynamic Range	DWDR
SNR	≥ 52 dB
Image Parameters Switch	Yes
Privacy Mask	Up to 4 Masks
ROI	1 Region
OSD Setting	Yes
Audio	
Audio Communication	Yes
Audio Input	Yes
Audio Output	N/A
Audio Compression	Yes
Audio Sampling Rate	8KHz
Environment Noise Filtering	Yes
Audio Bit Rate	64 Kbps(G.711 alaw)

Network	
Protocols	TCP/IP, UDP, ICMP, HTTP, HTTPS, DHCP, DNS, RTSP, NTP, UPNP, SSL/TLS, FTP, SFTP, RTP, IPv4, IPv6, ARP
Cyber Security	Video encryption, Configuration encryption, Digest Authentication, HTTPS, IP Address Filter, trusted upgrade
Network Storage	NAS (NFS, SMB/ CIFS)
SDK and API	Beta
Web Browser	Google Chrome® 57 and above Firefox® 52 and above Safari® 11 and above Microsoft® Edge 91 and above
Security	Password Protection, HTTPS Encryption, IP Address Filter, Digest Authentication
Simultaneous Live View	3 Main Streams & 3 Sub-Streams
Client	VIGI App, VIGI Security Manager, VIGI NVR, Web
Cloud	Yes
ONVIF	Yes (Profile S)
Interface	
Network Interface	1 RJ45 10/100M Self-Adaptive Ethernet Port, PoE
Storage	FTP, SFTP, Built-In Memory Card Slot, Support MicroSD Card up to 256 GB
Built-in Speaker	Yes
Built-in Microphone	Yes, Records Anything Going on within a 15-ft Radius of the Camera
Audio	N/A
Alarm	N/A
Reset Button	Yes
Power	DC Power Port

Alarm and Event Management		
Smart Event	Intrusion Detection, Line-Crossing Detection, Region Entering Detection, Region Exiting Detection, Object Abandoned Detection, Object Removal Detection, Loitering Detection, Smart Frame, People Detection, Vehicle Detection, Motion Detection, Video Tampering, Detection Exception (Illegal Login), Scene Change Detection	
Basic Event	Motion Detection, Video Tampering Detection, Exception (Illegal Login),	
Alarm Linkage	Memory Card Video Recording, Message Push, White Light Flashing	
Linkage Method	N/A	
Output Notification	Message Push	
General		
Operating Temperature	-30–60 °C	
Storage Temperature	-40–60 °C	
Operating Humidity	95% or Less (Non-Condensing)	
Storage Humidity	95% or Less (Non-Condensing)	
Power Supply	12V DC ± 5%, 5.5mm Coaxial Power Plug PoE (802.3af/at, class 0)	
Power Consumption	Maximum	14 W
	Typical (Day Mode)	2.9 W
	Typical (Night Mode with IR LED)	5.7 W
	Typical (Night Mode with White LED)	6.1 W
Material	Plastic	

Protection	IP66
Product Dimensions (L x W x H)	107*136*139 mm
Package Contents	VIGI Network Camera Quick Start Guide Waterproof Cable Attachments Mounting Accessories
Net Weight	0.43 Kg
Gross Weight	0.66 Kg
Certifications	CE, NTRA, VCCI, KC, BSMI, FCC, IC

Dimensions

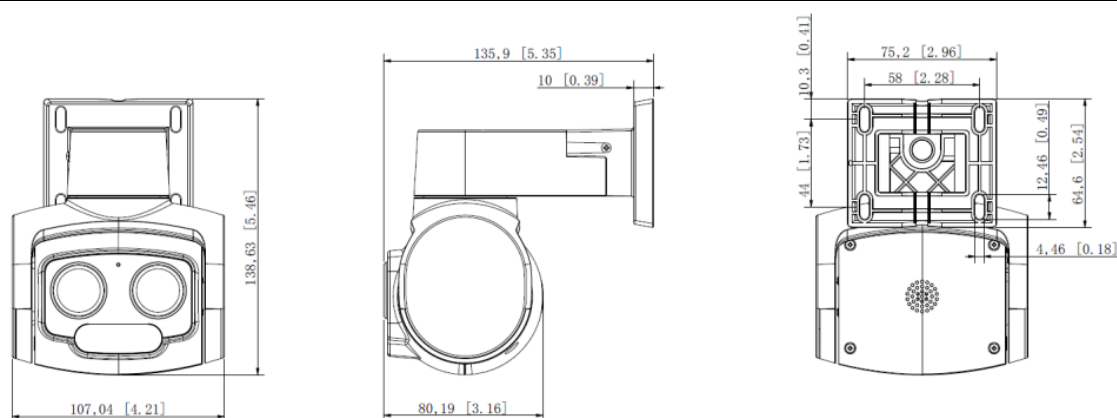

*SD card is not included in the package.

Specifications are subject to change without notice and can be found at www.tp-link.com.

©2023 TP-Link